




# NTN-SNR BEARING RULMENTI S.R.L.

15.875 mm x 26.988 mm x 23.8 mm skf GEZM 010 ES Radial spherical plain bearings

Bearing No. GEZM 010 ES

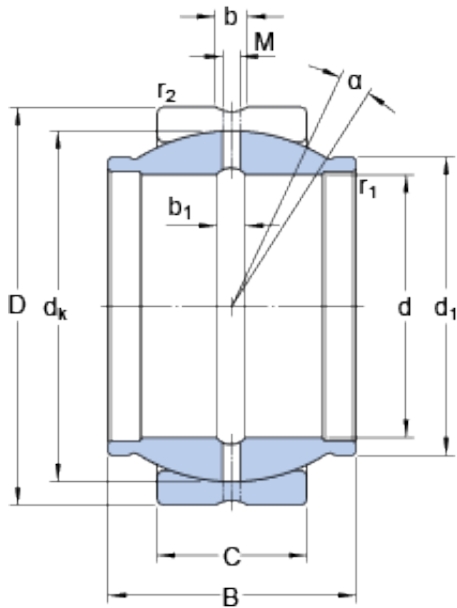

GEZM 010 ES Bearing 2D drawings and 3D CAD models

Size	26.988x15.875x23.8 mm
Bore Diameter	26,988 mm
Outer Diameter	15,875 mm
Width	23,8 mm
d	15.875 mm
D	26.988 mm
B	23.8 mm
C	11.913 mm
	9 °
d <sub>k</sub>	22.835 mm
d <sub>1</sub>	19.812 mm
b	3.2 mm
b <sub>1</sub>	3 mm
M	2.5 mm
r <sub>1</sub> - min.	0.6 mm
r <sub>2</sub> - min.	1 mm
d <sub>a</sub> - min.	18.4 mm
d <sub>a</sub> - max.	19.8 mm
D <sub>a</sub> - min.	21.7 mm
D <sub>a</sub> - max.	23.6 mm
r <sub>a</sub> - max.	0.6 mm
r <sub>b</sub> - max.	1 mm
Basic dynamic load rating - C	21.6 kN
Basic static load rating - C <sub>0</sub>	65.5 kN



## NTN-SNR BEARING RULMENTI S.R.L.

Specific factor dynamic load - K	100 N/mm <sup>2</sup>
Specific factor static load - K <sub>0</sub>	300 N/mm <sup>2</sup>
Constant - K <sub>M</sub>	330
Lubricant	Regular relubrication – grease
Design (sliding contact surface combination)	Steel/steel
Sealing solution	-
	9 °
d <sub>k</sub>	22.835 mm
d <sub>1</sub>	19.812 mm
b <sub>1</sub>	3 mm
r <sub>1</sub> min.	0.6 mm
r <sub>2</sub> min.	1 mm
d <sub>a</sub> min.	18.4 mm
d <sub>a</sub> max.	19.8 mm
D <sub>a</sub> min.	21.7 mm
D <sub>a</sub> max.	23.6 mm
r <sub>a</sub> max.	0.6 mm
r <sub>b</sub> max.	1 mm
Basic dynamic load rating C	21.6 kN
Basic static load rating C <sub>0</sub>	65.5 kN
Specific dynamic load factor K	100 N/mm <sup>2</sup>
Specific static load factor K <sub>0</sub>	300 N/mm <sup>2</sup>
Material constant K <sub>M</sub>	330
Mass plain bearing	0.041 kg