




# NTN-SNR BEARING RULMENTI S.R.L.

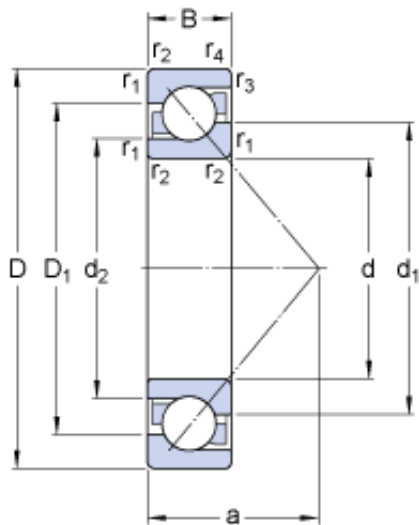

30 mm x 72 mm x 19 mm skf 7306 BEGBM  
Single row angular contact ball bearings

Bearing No. 7306 BEGBM

7306 BEGBM Bearing 2D drawings and 3D CAD models

Size	72x30x19 mm
Bore Diameter	72 mm
Outer Diameter	30 mm
Width	19 mm
d	30 mm
D	72 mm
B	19 mm
d <sub>1</sub>	46.5 mm
d <sub>2</sub>	37.9 mm
D <sub>1</sub>	56.6 mm
a	31 mm
r <sub>1,2</sub> - min.	1.1 mm
r <sub>3,4</sub> - min.	0.6 mm
d <sub>a</sub> - min.	37 mm
D <sub>a</sub> - max.	65 mm
D <sub>b</sub> - max.	67.8 mm
r <sub>a</sub> - max.	1 mm
r <sub>b</sub> - max.	0.6 mm
Basic dynamic load rating - C	32.5 kN
Basic static load rating - C <sub>0</sub>	19.3 kN
Fatigue load limit - P <sub>u</sub>	0.815 kN
Reference speed	12000 r/min
Limiting speed	12000 r/min
Calculation factor - k <sub>r</sub>	0.1



## NTN-SNR BEARING RULMENTI S.R.L.

Calculation factor - $k_a$	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - $Y_0$	0.52
Calculation factor - $Y_1$	0.55
Calculation factor - $Y_2$	0.93
Calculation factor - X	0.35
Calculation factor - $Y_0$	0.26
Calculation factor - $Y_1$	
Calculation factor - $Y_2$	0.57
$d_1$	46.5 mm
$d_2$	37.9 mm
$D_1$	56.6 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
$d_a$ min.	37 mm
$D_a$ max.	65 mm
$D_b$ max.	67.8 mm
$r_a$ max.	1 mm
$r_b$ max.	0.6 mm
Basic dynamic load rating C	32.5 kN
Basic static load rating $C_0$	19.3 kN
Fatigue load limit $P_u$	0.815 kN
Calculation factor A	0.0074
Calculation factor $k_r$	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor $Y_0$	0.26
Calculation factor $Y_2$	0.57
Calculation factor X	0.57
Calculation factor $Y_0$	0.52



## NTN-SNR BEARING RULMENTI S.R.L.

Calculation factor $Y_1$	0.55
Calculation factor $Y_2$	0.93
Mass bearing	0.34 kg